

primus

Rigid Mounted Industrial Washer Extractors RS 16, RS 22



FEATURES

- Rigid mounted, medium spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Large drain valve (75 mm)
- Easy access to all parts
- Patented soap hopper and drain valve (Liqui-Mix® system)
- Frequency controlled motor
- Power Wash® perforated lifting ribs: more mechanical action, lower water consumption


OPTIONS

- Full control (FC) microprocessor
- Soft wash version (wet cleaning)
- Coin operated timer
- Anti-vandalism fascia panel
- Liquid soap pumps
- Water recovery kit
- LPMS networking software

liqui-mix®

POWERWASH®

TYPE		RS 16	RS 22
CAPACITY			
Drum volume	l	162	217
Capacity	kg	16	22
Drum dimensions	mm	Ø700x420	Ø700x565
MOTOR			
Frequency controlled		standard	standard
DRUM SPEED			
Wash speed	rpm	45	45
Spin speed	rpm	450	450
G-factor spin speed		80	80
PROGRAMMER			
EC - microprocessor		standard	standard
FC - microprocessor		+	+
CABINET			
Stainless steel AISI 304		standard	standard
Coloured panels		+	+
FIXING			
		yes	yes
HEATING			
100% hot water	°C	90	90
	°F	194	194
100% electrical	220-240V	kW	12-18
	380-400V	kW	12-18
Hot water and electrical			
Additional heating	220-240V	kW	12-18
	380-400V	kW	12-18
Steam additional heating	bar	3-7	3-7
Steam high pressure	bar	3-7	3-7
CONNECTION			
Electrical	220-240V	3AC/50Hz	3AC/50Hz
	380-400V	3AC+N/50Hz	3AC+N/50Hz
		Others on request	Others on request
Water inlet	inch	3/4"	3/4"
Steam inlet	inch	1/2"	1/2"
DIMENSIONS			
HxWxD	mm	1315x855x910	1315x855x1135
TRANSPORT DATA			
Gross weight			
Cardboard packing	kg	330	410
Net weight	kg	305	375
Volume (packed)			
Cardboard packing	m ³	1,3	1,58
Cardboard packing HxWxD	mm	1500x935x940	1500x935x1130
+ = Available			
Standard = Standard version			

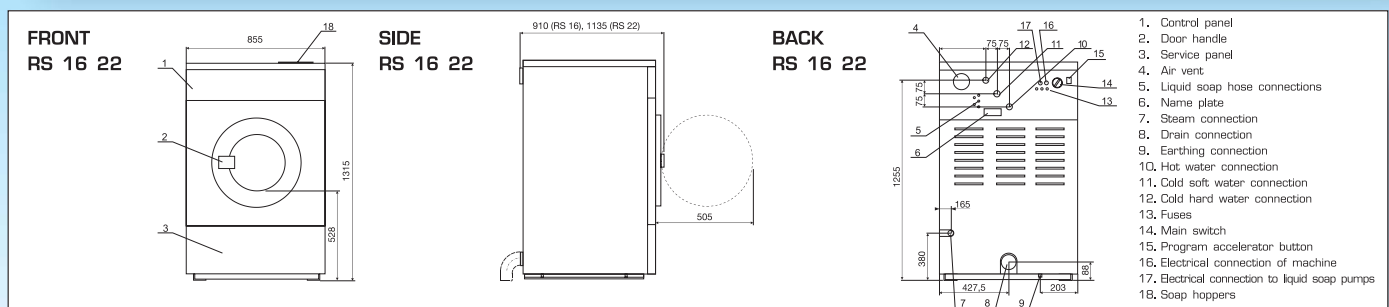

The company Primus bvba preserves the right to change the machines and the specifications in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

primus

Bvba
Certified Company
ISO 9001

CE

Quality **without**
compromise