

primus

Rigid Mounted Industrial Washer Extractors RS 6, RS 7, RS 10



FEATURES

- Rigid mounted, medium spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Large drain valve (75 mm)
- Easy access to all parts
- Patented soap hopper and drain valve (Liqui-Mix® system)
- Standard liquid soap connections
- Compact width: 660 mm, ideal for replacing existing models (including models of most competitors)
- Frequency controlled motor
- Power Wash® perforated lifting ribs more mechanical action, lower water consumption


OPTIONS

- Full control (FC) microprocessor
- Liquid soap pumps
- Soft wash version (wet cleaning)
- Coin operated timer
- Anti-vandalism fascia panel
- Water recovery kit
- LPMS networking software

liqui-mix®

POWERWASH®

TYPE		RS 6	RS 7	RS 10
CAPACITY				
Drum volume	l	60	73	95
Capacity	kg	6	7	10
Drum dimensions	mm	∅530x270	∅530x330	∅530x420
MOTOR				
Frequency controlled		standard	standard	standard
DRUM SPEED				
Wash speed	rpm	48	48	48
Spin speed	rpm	500	500	500
G-factor spin speed		80	80	80
PROGRAMMER				
EC microprocessor		standard	standard	standard
FC microprocessor		+	+	+
CABINET				
Stainless steel AISI 304		standard	standard	standard
Coloured panels		+	+	+
FIXING				
		yes	yes	yes
HEATING				
100% hot water	°C	90	90	90
	°F	194	194	194
100% electrical	220-240V	kW	6-9	6-9-12
	380-400V	kW	6-9	6-9-12
Hot water and electrical	220-240V	kW	6-9	6-9-12
Additional heating	380-400V	kW	6-9	6-9-12
Steam additional heating	bar	3-7	3-7	3-7
Steam high pressure	bar	3-7	3-7	3-7
CONNECTION				
Electrical	220-240V	3AC/50Hz	3AC/50Hz	3AC/50Hz
	380-400V	3AC/50Hz	3AC/50Hz	3AC/50Hz
		Others on request	Others on request	Others on request
Water inlet	inch	3/4"	3/4"	3/4"
Steam inlet	inch	1/2"	1/2"	1/2"
DIMENSIONS				
HxWxD	mm	1045x660x710	1045x660x710	1140x660x865
TRANSPORT DATA				
Gross weight				
Cardboard packing	kg	167	165	220
Net weight	kg	152	150	195
Volume (packed)				
Cardboard packing	m ³	0,6	0,6	0,8
Cardboard packing HxWxD	mm	1180x700x730	1180x700x730	1300x700x880
+ = Available				
Standard = Standard version				

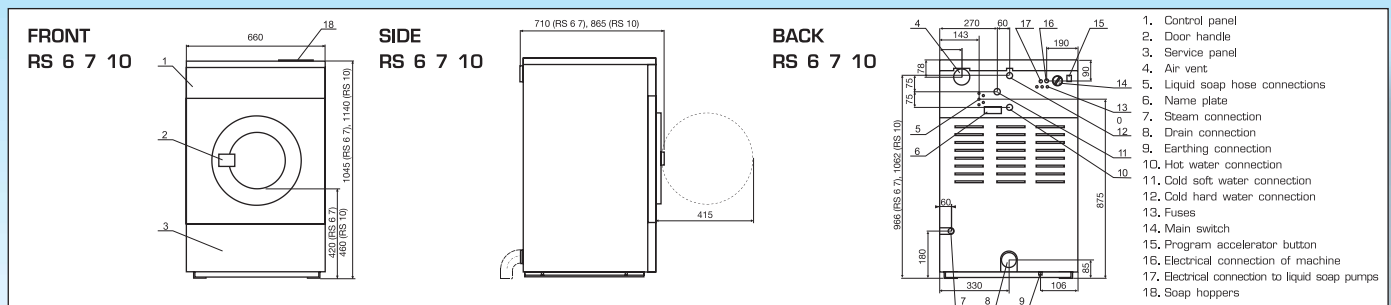

The company Primus bvba preserves the right to change the machines and the specifications in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

primus

Bvba
Certified Company
ISO 9001



Quality **without**
compromise