

primus

High Spin Industrial Washer Extractors FS 33, FS 40, FS 55



FEATURES


- Freestanding, high spin
- Stainless steel cabinet (AISI 304)
- Stainless steel drum and tub
- Standard Full control (FC) microprocessor (multilingual, freely programmable)
- Large door opening (53 cm) for easy loading and unloading
- Large drain valves (2 x 75 mm)
- Easy access to all parts
- Standard liquid soap connections
- Frequency controlled motor
- Patented soap dispenser with 5 removable compartments
- Power Wash® perforated lifting ribs: more mechanical action, lower water consumption

OPTIONS

- Low steam pressure heating
- Liquid soap pumps
- Soft wash version (wet cleaning)
- Liquid manifold
- LPMS networking software

POWERWASH®

TYPE		FS 33	FS 40	FS 55
CAPACITY				
Drum volume	l	335	400	518
Capacity	kg	33	40	55
Drum dimensions	mm	∅914x510	∅914x610	∅914x790
MOTOR				
Frequency controlled		standard	standard	standard
DRUM SPEED				
Wash speed	rpm	7-50	7-50	7-50
Distribution speed	rpm	90	90	90
Spin speed	rpm	301-830	301-830	301-830
G-factor		365	351	351
PROGRAMMER				
FC microprocessor		standard	standard	standard
CABINET				
Stainless steel AISI 304		standard	standard	standard
SAFETY FIXING				
		4xM16	4xM16	4xM16
HEATING				
100% hot water	°C	90	90	90
	°F	194	194	194
100% electrical	kW	24	36	54
Hot water and electrical	kW	24	36	54
Steam additional heating	bar	3-8	3-8	3-8
Steam high pressure	bar	3-8	3-8	3-8
CONNECTION				
Electrical	220-240V 380-400V	3AC+PE/60Hz 3AC+PE+N/50Hz Others on request	3AC+PE 3AC+PE+N Others on request	3AC+PE 3AC+PE+N/50Hz Others on request
Water inlet	inch	1"	1"	1"
Steam inlet	inch	3/4"	3/4"	3/4"
DIMENSIONS				
HxWxD	mm	1905x1195x1330	1905x1195x1430	1905x1195x1610
TRANSPORT DATA				
Gross weight				
Crate packing	kg	1370	1700	1770
Net weight	kg	1230	1560	1630
Volume (packed)				
Crate packing	m ³	4,4	4,7	5,3
Crate packing HxWxD	mm	2105x1430x1475	2105x1430x1570	2105x1430x1750
Standard = Standard version				

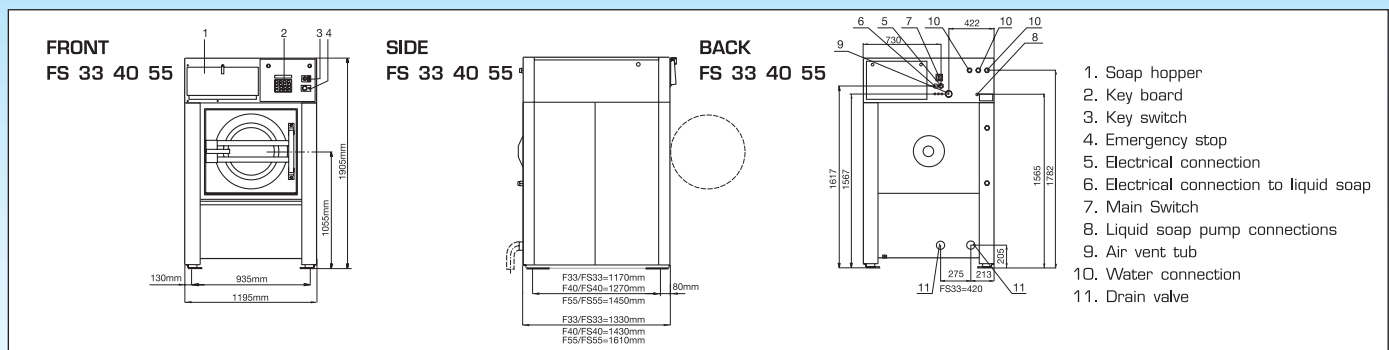

The company Primus bvba preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

primus

Quality without compromise

Bvba
Certified Company
ISO 9001

CE